


Product data sheet

Specifications

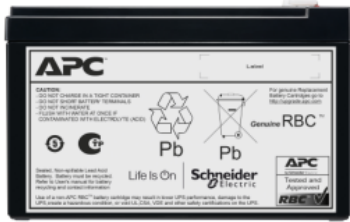

APC Replacement Battery Cartridge, VRLA, 7Ah, 12V DC, 2-year warranty

APCRBCV210

Overview

Lead time Usually in Stock

Main

Product or Component Type Replacement battery cartridge

Main Output Voltage 12 V DC

Number of rack unit 0U

Battery Type VRLA

Batteries & Runtime

Battery Placement Internal Battery

Battery blocks per string 1

Battery Slots Empty 0

Included Battery Modules 0

Battery Voltage 12 V

RBC Quantity 1

Physical

Height 3.90 in (99 mm)

Width 2.56 in (65 mm)

Depth 5.94 in (151 mm)

Net Weight 4.06 lb(US) (1.84 kg)

Mounting Mode Not rack-mountable

USB compatible No

Output

Battery Capacity 7 Ah

Conformance

Product Certifications CB

Environmental

Ambient air temperature for operation	32...104 °F (0...40 °C)
Operating altitude	0...6561.68 ft (0...2000 m)
Relative Humidity	0...90 % non-condensing
Ambient Air Temperature for Storage	5...113 °F (-15...45 °C)
Storage altitude	0.00...9842.52 ft (0...3000 m)
Storage Relative Humidity	0...95 % non-condensing

Ordering and shipping details

GTIN	731304451129
------	--------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.69 in (17.000 cm)
Package 1 Width	6.10 in (15.500 cm)
Package 1 Length	7.36 in (18.700 cm)
Package 1 Weight	4.49 lb(US) (2.035 kg)
Unit Type of Package 2	BB1
Number of Units in Package 2	6
Package 2 Height	7.36 in (18.700 cm)
Package 2 Width	15.35 in (39.000 cm)
Package 2 Length	19.29 in (49.000 cm)
Package 2 Weight	28.72 lb(US) (13.026 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	36
Package 3 Height	20.47 in (52.000 cm)
Package 3 Width	31.50 in (80.000 cm)
Package 3 Length	47.24 in (120.000 cm)
Package 3 Weight	194.01 lb(US) (88.000 kg)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	2 Years
----------	---------

Recommended replacement(s)